



# "LENOX" SAW BLADES - USA

## NO. S 85-10 "LENOX" BI-METAL JIG SAW BLADE UNIVERSAL TYPE (U SHANK)

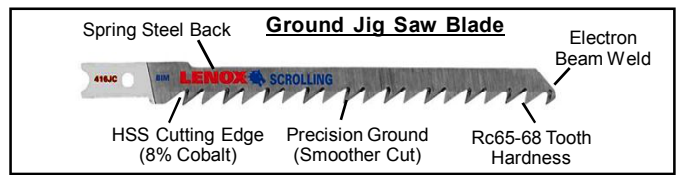

- Shock resistance.
- High wear resistance.
- High heat resistance.

 : Universal Type Shank fits most of the HITACHI, B&D, BOSCH (U-Series) jig saws.



\* 324J



\* 340JV



450J



\* 480J



486J



B318U3



\* BT324J



BT320JC



\* BT324J



BT332J



BT416JC



BT450J



BT450JR




BT456J



\* BT480J



BT486J



BT686J



GT300J

Item No.	Lgth x TPI Thickness x Width	Milled or Ground	Application	Price (set of 5pcs)
085-10-324J	3-5/8" x 24T 0.9mm x 10mm	Milled	Stainless steel, sheet metal: Up to 3.2mm thick. Non-ferrous metal: Up to 6mm thick.	
085-10-340JV	3-1/2" x 10/14T 0.9mm x 10mm	Milled	Wood, plastic: 5-25mm. Steels: 3.2-10mm. Non-ferrous metal: 3.2-20mm.	
085-10-450J	4" x 10T 1.3mm x 8mm	Ground	Ground teeth for fast, smooth cuts in wood, plastic and composition material: 5-38mm thick.	
085-10-480J	4" x 10T 1.3mm x 10mm	Milled	Wood, nail-embedded wood: 6-50mm thick. All steels: 3.2-13mm. Soft metals: 3.2-25mm.	
085-10-486J	4" x 6T 1.3mm x 10mm	Milled	Fast, rough cutting in wood and composition material: 10-50mm thick.	
<b>(set of 3pcs)</b>				
085-10-B318U3	3-5/8" x 18T 0.9mm x 9.5mm	Milled	Structural steel: 1.6 to 6.4mm	
<b>(set of 2pcs)</b>				
085-10-BT314J	3-5/8" x 14T 0.9mm x 10mm	Milled	Steels: 2.5-6mm. Non-ferrous metal: 2.5-10mm.	
085-10-BT320JC	2-3/4" x 20T 1.3mm x 5mm	Ground V	Ground teeth for contour cutting in wood, veneer, laminate and plastic 1.5-13mm thick.	
085-10-BT324J	3-5/8" x 24T 0.9mm x 10mm	Milled	Stainless steel, sheet metal: Up to 3.2mm thick. Non-ferrous metal: Up to 6mm thick.	
085-10-BT332J	3-5/8" x 32T 0.9mm x 10mm	Milled	Thin stainless steel, sheet metal: Up to 1.6mm. Non-ferrous metal: Up to 3.2mm thick.	
085-10-BT416JC	4" x 6T 1.3mm x 6mm	Ground	Ground teeth for clean contour cuts in wood, plastic and composition material: 10-38mm thick.	
085-10-BT450J	4" x 10T 1.3mm x 8mm	Ground	Ground teeth for fast, smooth cuts in wood, plastic and composition material: 5-38mm thick.	
085-10-BT450JR	4" x 10T 1.3mm x 8mm	Ground	Ground teeth for chip-free down cutting in formica, laminate and plastic: 5-38mm thick.	
085-10-BT456J	4" x 6T 1.3mm x 8mm	Ground	Ground teeth for fast, clean cutting in wood, plastic and composition material: 10-50mm thick.	
085-10-BT480J	4" x 10T 1.3mm x 10mm	Milled	Wood, nail-embedded wood: 6-50mm. All steels: 3.2-13mm. Soft metals: 3.2-25mm.	
085-10-BT486J	4" x 6T 1.3mm x 10mm	Milled	Fast, rough cutting in wood and composition material: 10-50mm thick.	
085-10-BT686J	6" x 6T 1.3mm x 10mm	Milled	Fast, rough cutting in wood and composition material: 10-89mm.	
085-10-GT300J	3-1/2" 0.8mm x 8mm	Medium Carbide Grit	Cast Iron, Fiberglass, Ceramic Tile, Hard Plaster.	

\* Tuff Tooth™