


"LENOX" SAW BLADES - USA



NO. S 85-9 "LENOX" BI-METAL RECIPROCATING SAW BLADE

Blade Construction

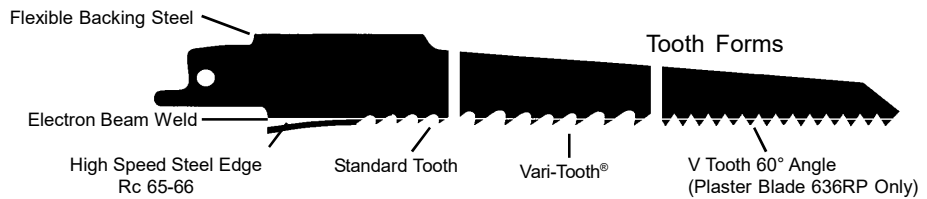

- Shatterproof bi-metal construction.
- 8% cobalt HSS cutting edge with tooth hardness RC65-66.
- Precision-milled & shock-resistant teeth make for more aggressive cuts and longer life.
- Universal shank fits most brands of reciprocating saws.

Model	Item No.	Length x Thickness, Teeth per inch x Width	Application	Price (per pack)
* 018R	085-09-018RB (5+1 Bonus)	10" x 0.9mm x 18T x 19mm	Structural steel, pipe, conduit, stainless steel: 1.5-5mm thick. Non-ferrous metal: 1.5-8mm.	
* 054R	085-09-054RB (5+1 Bonus)	10" x 1.3mm x 14T x 19mm	Pipe, structural steel, stainless steel: 2.5-6mm Non-ferrous metal : 2.5-10mm. Hard rubber.	
* 110R	085-09-110R (5-pc Pack) 085-09-110RB (5+1 Bonus)	12" x 1.3mm x 10/14T x 19mm	Nail-embedded wood, composition materials, & plastics. Pipe, carbon steel, stainless steel : 3.2-6mm. Non-ferrous metal: 3.2-13mm thick.	
* 118R	085-09-118R (5-pc Pack) 085-09-118RB (5+1 Bonus)	12" x 0.9mm x 18T x 19mm	Structural steel, pipe, conduit, stainless steel: 1.5-5mm thick. Non-ferrous metal: 1.5-8mm.	
156R	085-09-156R (5-pc Pack) 085-09-156RB (5+1 Bonus)	12" x 1.3mm x 6T x 19mm	Roughing-in work and nail-embedded wood. Fast cutting. Pipe, structural steel, stainless steel, non-ferrous metal: 5mm thicker.	
* 314RC	085-09-314RC (5-pc Pack)	3" x 0.9mm x 14T x 8mm	Contour cutting in wood less than 20mm thick & in metal 2.5-8mm thick.	
* 318RC	085-09-318RC (5-pc Pack)	3" x 0.9mm x 18T x 8mm	Contour cutting in metal: 1.5-3.2mm	
* 414R	085-09-414R (5-pc Pack)	4" x 0.9mm x 14T x 19mm	Pipe, structural steel, stainless steel: 2.5-6mm Non-ferrous metal : 2.5-10mm. Hard rubber.	
* 418R	085-09-418R (5-pc Pack)	4" x 0.9mm x 18T x 19mm	Structural steel, pipe, conduit, stainless steel: 1.5-5mm thick. Non-ferrous metal: 1.5-8mm.	
* 424R	085-09-424R (5-pc Pack)	4" x 0.9mm x 24T x 19mm	All metals less than 3.2mm thick. Tubing, conduit trim.	

* Tuff Tooth™